



## Genie Z-60/34 Diesel Articulating Boom

### STANDARD FEATURES

- Self-levelling platform
- Hydraulic platform rotation
- Proportional joystick controls
- Thumb rocker steering
- Drive enable
- AC power cord to platform
- Horn
- Hour meter
- Tilt alarm
- Descent & travel alarms
- Flashing beacon
- 360° continuous turntable rotation
- Locking turntable covers
- Zero tailswing
- Positive traction drive
- 2 speed wheel motors
- Certified load sensor
- 12V DC auxiliary power
- Engine protection package
- Anti-restart engine protection
- Auto engine fault shutdown

## IPAF Category 3b

### Do you hold a valid operator's licence?

The PAL Card (Powered Access Licence) is recognised worldwide as proof of platform operator training to the highest standard.

It is issued by the International Powered Access Federation (IPAF) to platform operators who successfully complete a training course at an IPAF approved training centre.

#### Quick checklist for employers and operators using powered access machines:

- ✓ I have an IPAF PAL card.
- ✓ Date is still valid (Licence expires after 5 years).
- ✓ All categories for the machine's being used are listed on the PAL card (e.g. 3a, 3b, PAV).

If you can answer yes to all three, you're good to go!

**If not, please call us to discuss your requirements and arrange a training course.**



# Z-60/34

## Diesel Articulating Boom




Specifications	Z-60/34
Working height maximum	20.39 m
Platform height maximum	18.39 m
Horizontal reach maximum	11.05 m
Up and over clearance maximum	8.23 m
Platform length - 8 ft / 6 ft model	0.91 m / 0.76 m
Platform width - 8 ft / 6 ft model	2.44 m / 1.83 m
Height - stowed	2.69 m
Length - stowed	8.15 m
Width	2.46 m
Wheelbase	2.51 m
Ground clearance - center	0.41 m

Productivity	Z-60/34
Lift capacity	227 kg
Platform rotation	180°
Vertical jib rotation	90°
Turntable rotation	360° continuous
Turntable tailswing	zero
Drive speed - stowed 2WD - 4WD	4.8 km/h
Drive speed - raised	1.1 km/h
Lift speed to full height	42 sec
Gradeability - 2WD - stowed	25%
Gradeability - 4WD - stowed	40%
Turning radius - inside	3.04 m
Turning radius - outside	6.07 m
Controls	Proportional
Tyres	355/55 D625

Power	Z-60/34
Auxiliary power unit	12V DC
Hydraulic tank capacity	170.3 L
Fuel tank capacity	75.7 L

Weight	Z-60/34
CE 4WD (air tyres)	10,215 kg
CE 4WD (foam filled tyres)	11,231 kg

Range Of Motion Z-60/34

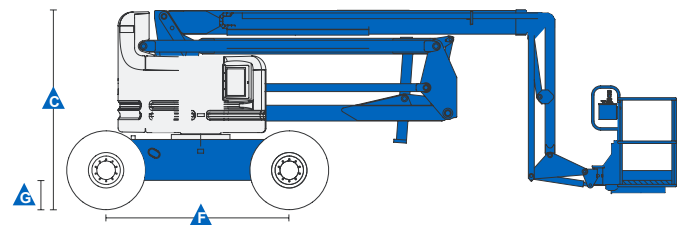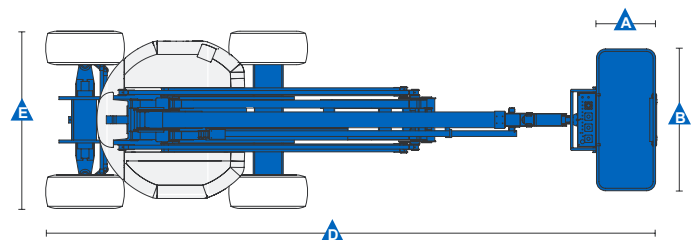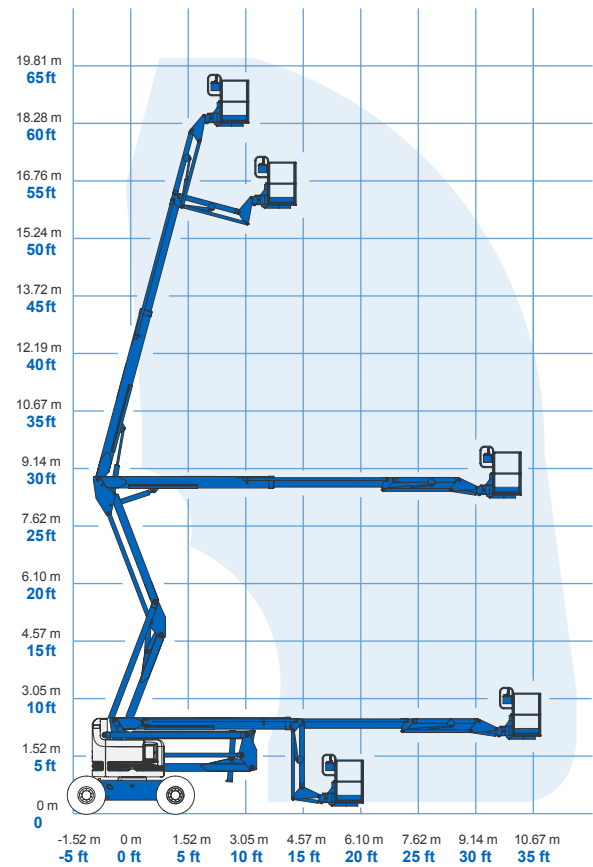

Hire • Sales • Training

0844 682 0000

www.starplatforms.co.uk

info@starplatforms.co.uk

UK Coverage

We offer a true UK wide hire service via a network of strong, regional access companies who share Star Platforms' values, offering high service levels and quality equipment.

