

SEE WHAT WE CAN DO FOR YOU



We believe collaboration is crucial for providing exceptional working at height and power solutions.

Star Platforms and Star Power share the same values, focusing on delivering outstanding equipment, service, support, and safety.

By choosing Star, you're not just opting for equipment hire; you are selecting a partnership that prioritises providing quality, safe, and sustainable services to our customers.



TALK TO THE HIRE EXPERTS

POWERED ACCESS HIRE, SALES & TRAINING

Push Arouds
working height from 3.5m to 5.1m

Scissor Lifts
working height from 5.66m to 22m

Boom Lifts
working height from 8.2m to 28m

Next day delivery
on core access equipment, providing seamless operations for your projects

Secondary guarding solutions available
Accessories, IPAF approved harnesses & material handling attachments

TEMPORARY POWER GENERATOR HIRE, BATTERY STORAGE & FUEL MANAGEMENT

Generator Hire - from 6kVA to 500kVA

Battery Storage to cut carbon emissions and costs

Fuel Management for uninterrupted supply
Loadbanks for accurate, reliable electrical testing

Site Services – connecting power, water and waste

Heating & Lighting hire

Water Bowers – water storage or dust suppression

For Temporary Power
call **Star Power** on **03300 535622**

For Working at Height
call **Star Platforms** on **0844 682 0000**

HIRE TODAY CONTACT YOUR LOCAL DEPOT
Star Platforms – 0844 682 0000 | Star Power - 03300 535622

MAKING ACCESS HIRE SIMPLE

DELIVERING A FIRST CLASS SERVICE FROM START TO FINISH IS ALWAYS OUR GOAL.

Star Platforms is an independently owned company, operated by a team with many years of experience in powered access.

We know what is important to our customers and delivering a first class service from start to finish is always our primary goal. This applies to all customers and every hire, so whether you are an infrequent user or a regular user of powered access you can be confident that **Star Platforms** will deliver.

Hire, lease, or buy: machines are available for regular hire, long term contract hire or outright purchase (new and used). *Whichever suits you best.*

0844 682 0000 info@starplatforms.co.uk

www.starplatforms.co.uk



**ACCESS
ALLIANCE**
We offer a true UK wide hire service via a network of strong regional access companies who share Star Platforms' values, offering high service levels and quality equipment.

PUSH AROUND

WORKING HEIGHT UP TO 5.1m



SCISSOR LIFTS

WORKING HEIGHT UP TO 22.0m




BOOM LIFTS

WORKING HEIGHT UP TO 28.0m



Next day delivery
on core access equipment, providing seamless operations for your projects

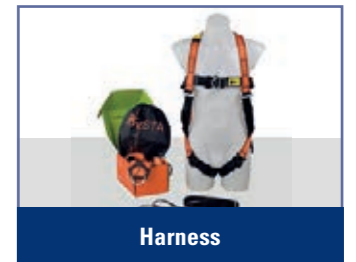

Accessories, IPAF approved harnesses & material handling attachments




Ask about our secondary guarding solutions on our equipment



STRAIGHT UP


PUSH AROUND & SCISSOR LIFTS

LP9TN
Power Tower
4.50m
2.50m
1.20m
N/A
1.56m
0.75m
200kg
285kg
Battery
Non Marking
Flat / Slab
PAV




IPAF TRAINING
Do you hold a valid operator's licence?
For a full list of IPAF categories visit www.starplatforms.co.uk/training


LM5PE
Power Tower
3.50m
1.50m
0.99m
N/A
1.55m
0.70m
150kg
180kg
Manual
Non Marking
Flat / Slab
PAV




LE9TN
Power Tower
4.50m
2.50m
1.20m
0.50m
1.59m
0.75m
200kg
478kg
Battery
Non Marking
Flat / Slab
3a



LM7PE
Power Tower
4.20m
2.20m
1.28m
N/A
1.94m
0.70m
150kg
305kg
Manual
Non Marking
Flat / Slab
PAV




LP11PT
Power Tower
5.10m
3.10m
1.60m
N/A
1.85m
0.78m
250kg
342kg
Battery
Non Marking
Flat / Slab
PAV




Group Code
Manufacturer
Reach Height (Max)
Platform Height (Max)
Length (Stowed)
Deck Extension
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
IPAF Licence Category

LE12VM
Skyjack
5.66m
3.66m
1.37m
0.41m (Traversing)
1.88m
0.77m
227kg
864kg
Battery
Non Marking
Flat / Slab
3a




Group Code
Manufacturer
Reach Height (Max)
Platform Height (Max)
Length (Stowed)
Deck Extension
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
IPAF Licence Category

SE1430
Skyjack
6.40m
4.40m
1.49m
0.51m
1.59m
0.76m
240kg
820kg
Battery
Non Marking
Flat / Slab
3a




Group Code
Manufacturer
Reach Height (Max)
Platform Height (Max)
Length (Stowed)
Deck Extension
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
IPAF Licence Category

LE16VM
Skyjack
6.72m
4.72m
1.37m
0.41m (Traversing)
1.88m
0.77m
227kg
931kg
Battery
Non Marking
Flat / Slab
3a




Group Code
Manufacturer
Reach Height (Max)
Platform Height (Max)
Length (Stowed)
Deck Extension
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
IPAF Licence Category

SE1932
Skyjack
7.65m
5.65m
1.80m
0.91m
1.78m
0.81m
227kg
1476kg
Battery
Non Marking
Flat / Slab
3a




Group Code
Manufacturer
Reach Height (Max)
Platform Height (Max)
Length (Stowed)
Deck Extension
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
IPAF Licence Category

SD2668
Skyjack
9.92m
7.92m
3.35m
1.52m
1.61m
1.76m
567kg
3500kg
Diesel
Foam Filled
Rough Terrain
3a




Group Code
Manufacturer
Reach Height (Max)
Platform Height (Max)
Length (Stowed)
Deck Extension
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
IPAF Licence Category

SD4188
Skyjack
14.50m
12.50m
3.53m
1.22m x2
2.22m
2.20m
681kg
6173kg
Diesel
Foam Filled
Rough Terrain
3a




Group Code
Manufacturer
Reach Height (Max)
Platform Height (Max)
Length (Stowed)
Deck Extension
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
IPAF Licence Category

LE20VM
Genie
8.02m
6.02m
1.35m
0.51m
1.98m
0.80m
159kg
1112kg
Battery
Non Marking
Flat / Slab
3a




Group Code
Manufacturer
Reach Height (Max)
Platform Height (Max)
Length (Stowed)
Deck Extension
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
IPAF Licence Category

SE2632
Skyjack
9.79m
7.79m
2.32m
0.91m
1.93m
0.84m
227kg
2014kg
Battery
Non Marking
Flat / Slab
3a




Group Code
Manufacturer
Reach Height (Max)
Platform Height (Max)
Length (Stowed)
Deck Extension
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
IPAF Licence Category

SE2646
Skyjack
9.82m
7.82m
2.32m
1.22m
1.90m
1.19m
454kg
2135kg
Battery
Non Marking
Flat / Slab
3a




Group Code
Manufacturer
Reach Height (Max)
Platform Height (Max)
Length (Stowed)
Deck Extension
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
IPAF Licence Category


SE3232
Genie
11.75m
9.75m
2.44m
0.91m
2.03m
0.81m
227kg
2352kg
Battery
Non Marking
Flat / Slab
3a




SD3268
Skyjack
11.75m
9.75m
3.35m
1.52m
1.75m
1.76m
454kg
3781kg
Diesel
Foam Filled
Rough Terrain
3a




SD5092
Skyjack
17.24m
15.24m
4.47m
1.52m x2
2.29m
2.34m
681kg
7407kg
Diesel
Foam Filled
Rough Terrain
3a




SE3246
Genie
11.65m
9.65m
2.32m
1.22m
1.99m
1.19m
318kg
2571kg
Battery
Non Marking
Flat / Slab
3a




SE3268
Skyjack
11.75m
9.75m
3.35m
1.52m
1.75m
1.76m
454kg
3844kg
Battery
Non Marking
Rough Terrain
3a




SE3947
Skyjack
13.86m
11.86m
2.40m
0.91m
2.03m
1.19m
350kg
2970kg
Battery
Non Marking
Flat / Slab
3a




SE6649
Dingli
18.00m
16.00m
4.88m
1.43m / 1.16m
2.49m
2.29m
680kg
8,900kg
Battery
Non Marking
Rough Terrain
3a




SD4069
Dingli
14.30m
12.30m
3.84m
1.43m
1.97m
1.76m
363kg
5150kg
Diesel
Non Marking
Rough Terrain
3a




SD5092
Skyjack
18.15m
16.15m
4.42m
1.52m x2
2.40m
2.30m
681kg
8473kg
Diesel
Solid
Rough Terrain
3a




SE4069
Dingli
14.30m
12.30m
3.84m
1.43m
1.97m
1.76m
363kg
5150kg
Battery
Non Marking
All
3a




SE4549
Dingli
15.70m
13.70m
2.84m
0.90m
2.05m
1.25m
250kg
3180kg
Battery
Non Marking
Flat / Slab
3a



SE6649
Dingli
22.00m
20.00m
4.72m
1.80m
2.99m
1.25m
600kg
12,350kg
Battery
Non Marking
Flat / Slab
3a



SE6697
Dingli
22.00m
20.00m
4.95m
2.70m
3.00m
2.46m
750kg
13400kg
Battery
Non Marking
All
3a



DIESEL SCISSORS

ELECTRIC SCISSORS



UP & OVER

ARTICULATING BOOM LIFTS

IPAF TRAINING

Do you hold a valid operator's licence?

For a full list of IPAF categories visit www.starplatforms.co.uk/training




0844 682 0000
starplatforms.co.uk
hire@starplatforms.co.uk

DIESEL BOOMS

BI-ENERGY BOOMS


Group Code
Manufacturer
Reach Height (Max)
Platform Height (Max)
Working Outreach
Length (Stowed)
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
Boom Configuration
IPAF Licence Category

SJ46AJ 4X4




BD60A Skyjack
Reach Height (Max)
Platform Height (Max)
Working Outreach
Length (Stowed)
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
Boom Configuration
IPAF Licence Category

SJ63AJ 4X4




Group Code
Manufacturer
Reach Height (Max)
Platform Height (Max)
Working Outreach
Length (Stowed)
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
Boom Configuration
IPAF Licence Category

HR21D 4X4




BD65S Skyjack
Reach Height (Max)
Platform Height (Max)
Working Outreach
Length (Stowed)
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
Boom Configuration
IPAF Licence Category

SJ66T 4X4




Group Code
Manufacturer
Reach Height (Max)
Platform Height (Max)
Working Outreach
Length (Stowed)
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
Boom Configuration
IPAF Licence Category

HR12N




BB51A Niftylift
Reach Height (Max)
Platform Height (Max)
Working Outreach
Length (Stowed)
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
Boom Configuration
IPAF Licence Category

HR17N




Group Code
Manufacturer
Reach Height (Max)
Platform Height (Max)
Working Outreach
Length (Stowed)
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
Boom Configuration
IPAF Licence Category

HR12RT 4X4




BB51A-RT Niftylift
Reach Height (Max)
Platform Height (Max)
Working Outreach
Length (Stowed)
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
Boom Configuration
IPAF Licence Category

HR17RT 4X4




Group Code
Manufacturer
Reach Height (Max)
Platform Height (Max)
Working Outreach
Length (Stowed)
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
Boom Configuration
IPAF Licence Category

HR15N




BB62A Niftylift
Reach Height (Max)
Platform Height (Max)
Working Outreach
Length (Stowed)
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
Boom Configuration
IPAF Licence Category

HR21 HYBRID 4X4




Group Code
Manufacturer
Reach Height (Max)
Platform Height (Max)
Working Outreach
Length (Stowed)
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
Boom Configuration
IPAF Licence Category

HR15N




BB85A Niftylift
Reach Height (Max)
Platform Height (Max)
Working Outreach
Length (Stowed)
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
Boom Configuration
IPAF Licence Category

HR28 HYBRID 4X4




ELECTRIC BOOMS
BE20M JLG
Reach Height (Max)
Platform Height (Max)
Working Outreach
Length (Stowed)
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
Boom Configuration
IPAF Licence Category

TOUCAN 8-EL




BE30A Skyjack
Reach Height (Max)
Platform Height (Max)
Working Outreach
Length (Stowed)
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
Boom Configuration
IPAF Licence Category

SJ30 ARJE




BE26M Haulotte
Reach Height (Max)
Platform Height (Max)
Working Outreach
Length (Stowed)
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
Boom Configuration
IPAF Licence Category

STAR 10



BE31M Dingli
Reach Height (Max)
Platform Height (Max)
Working Outreach
Length (Stowed)
Closed Height (Stowed)
Width
Lifting Capacity
Weight
Power Supply
Tyres
Ideal Ground Conditions
Boom Configuration
IPAF Licence Category

AMWP11





TRAINING



Safety is of paramount importance for all owners and operators of powered access equipment.

Star Platforms offer a range of training courses accredited by the International Powered Access Federation (IPAF) covering areas including the selection, management and operation of MEWPs (Mobile Elevated Work Platforms).



IPAF promotes the safe and effective use of powered access equipment worldwide.

The International Powered Access Federation (IPAF) training programme is globally recognised, developed by leading industry professionals and available in multiple languages across a worldwide network of more than 750 IPAF-approved training centres.

IPAF training courses help you keep your employees safe and you stay legal.

ePAL Cards are given as standard but physical cards are available at an extra cost.



STAR TRAINING

Solutions Ensuring course availability when you need it, no matter how many delegates.

Expertise High-quality industry-specific trainers ready to get results.

Flexibility Training delivered at your site or ours, you decide.

MEWP OPERATOR TRAINING



MEWP Operator Training is the most popular type of IPAF training, as it equips you with all the skills and knowledge you would need to safely operate the most commonly used forms of mobile elevating work platforms.

Depending on the training course, you will be taught how to safely prepare and operate a variety of different category MEWPs including:

- Static Vertical (1a) – For example, van mounted scissor lifts
- Static Boom (1b) – Vehicle/truck mounted boom or trailer mounted booms etc.
- Mobile Vertical (3a) – Mobile scissor lifts
- Mobile Boom (3b) – ‘Cherry-pickers’
- Push Around Vertical (PAV) – Pecolift, Ecolift, Powertower, etc.

MEWPS FOR MANAGERS



Any manager who works in an environment where mobile elevating work platforms are regularly used should undertake an IPAF MEWPs for Managers course.


These courses will familiarise you with your legal responsibilities around MEWPs and how to effectively supervise others when they are using them. This training will make you aware of the work your team is doing, and how to oversee it. It will also show you how to use a MEWP yourself.

Unlike the operator course, MEWPs for Managers covers how to plan a job that requires the use of MEWPs, how to conduct a risk assessment, and how to select the correct equipment for specific tasks.

TEMPORARY POWER

GENERATORS FROM 6KVA TO 500KVA

DIESEL WHEEL BARROW SET 6KVA



Features

- 110V or 230V output
- Selection of 16A and 32A sockets
- Robust steel construction
- Fork pockets
- Stage 5 Yanmar engine
- Electric start
- Noise level: Super silent 65dBA @7M
- Autonomy: 18 hours at 75% load

Dimensions **L1020x W645 x H830 mm**

Weight **228 kg**

G20S | G20QS 20.3KVA SILENT DIESEL GENERATOR



Features

- Internal and external emergency stop button
- Heavy duty air filter
- Battery charger
- Engine coolant heater
- Fork pockets

Dimensions **L1750 x W790 x H1350 mm**

Weight **800 kg**

DIESEL SILENCED GENERATOR 30KVA




Features

- 230V 1PH & 400V 3PH outputs
- Selection of 16A & 32A single phase sockets
- 32A, 63A & 125A 3 phase sockets
- Fork pockets and lifting eye
- Stage 3A Iveco engine
- Emission reducing HVO fuel approved
- Noise level: super silent 63dBA @7M
- Autonomy: 21 hours at 75% load
- Optional road tow chassis, remote starting, timer starting/stopping

Dimensions **L2025 x W950 x H1620 mm**

Weight **1070 kg**

SUPER SILENT DIESEL GENSET 100KVA




Features

- Environmentally safe 110% bund
- Heavy duty fork pockets and lifting eye
- Iveco stage 3A diesel engine
- Emission reducing HVO fuel approved
- 3 phase 125A 5 pin socket outlet
- Noise level: Super silent 68dBA @7M
- Autonomy: 13 hours at full load
- Optional extras: Distribution boards, Road tow chassis, remote starting, timer starting/stopping

Dimensions **L2750 x W1100 x H1760 mm**

Weight **1689 kg**

G1150S | G1150S 107.9KVA SILENT DIESEL GENERATOR




Features

- 105kVA prime rated diesel generator
- JCB Dieselmex engine
- Fuel optimised
- 3-way valve
- Central lift & fork pockets
- Engine sump pump
- Battery charger
- Deep-sea 4520 control panel

Dimensions **L2850 x W1140 x H1850 mm**

Weight **1830 kg**

G100RS V 110KVA STAGE V GENERATOR




Features

- 100kVA Prime Rated
- 110kVA Standby Rated
- Sockets
- Stage IIIA
- Rental Base
- 50/60hz Switchable
- Bump Stops
- Fork pockets
- Rental Base
- Bunding
- Central lifting point
- 280L Internal Fuel Tank
- 3 Way Fuel Valve

Dimensions **L3192 x W1200 x H2050 mm**

Weight **2750 kg**

G45S | G450S 41KVA SILENT DIESEL GENERATOR




Features

- Silent diesel generator
- 41kVA prime
- JCB engine by Kohler
- Deep-sea control panel
- Fuel optimised
- Fork pockets
- Central lift
- Engine sump pump
- Busbars
- Earth leakage protection

Dimensions **L2250 x W840 x H1350 mm**

Weight **1000 kg**

G40RS V 44KVA STAGE V GENERATOR



Features

- 40kVA Prime Rated
- 44kVA Standby Rated
- Sockets
- Stage V (5)
- Rental Base
- 50/60hz Switchable
- Bump Stops
- Fork pockets
- Rental Base
- Bunding
- Central lifting point
- 175L Internal Fuel Tank
- 3 Way Fuel Valve

Dimensions **L2265 x W1050 x H1574 mm**

Weight **1400 kg**

DIESEL SILENCED GENERATOR 60KVA




Features

- Selection of 16A & 32A single phase sockets
- 32A, 63A & 125A 3 phase sockets
- Fork pockets and lifting eye
- Stage 3A Iveco engine
- Emission reducing hvo fuel approved
- Noise level: super silent 63dBA@7m
- Autonomy: 21 hours at 75% load
- Optional road tow chassis, remote starting, timer starting/stopping

Dimensions **L2160 x W1070 x H1760 mm**

Weight **1750 kg**

G220S | G220QS 202.4KVA SILENT DIESEL GENERATOR



Features

- 300kVA prime
- 330kVA standby
- Cummins engine
- Deep-sea 7 series control panel
- Fork pockets
- Central lift
- Earth leakage
- 3-way valve
- Battery isolator
- Bump stops

Dimensions **L3800 x W1140 x H2075 mm**

Weight **2700 kg**

G3300S 275KVA SILENT DIESEL GENERATOR




Features

- 300kVA prime
- 330kVA standby
- Cummins engine
- Deep-sea 7 series control panel
- Fork pockets
- Central lift
- Earth leakage
- 3 Way valve
- Battery isolator
- Bump stops

Dimensions **L3900 x W1400 x H2340 mm**

Weight **4350 kg**

G545X | G5450X 500KVA SILENT DIESEL GENERATOR



Features

- 81ltr bunded integrated fuel tank
- Battery charger
- Engine block heater
- Weatherproof enclosure
- 63amp MCB
- Ce pack
- Forklift pockets
- Central lifting point
- Door stays
- Bump protection blocks


Dimensions **L4500 x W1800 x H2340 mm**

Weight **4757 kg**


SECURE POWER

SECURE FUEL

BATTERY STORAGE



POWER POD
Containerised Unit 10ft - 20ft



FUELPOD
Lockable, highly secure containerised unit with ventilation panel



HUSH Pod
45kVA and 60kVA

Our battery storage solutions are ideal for events, working underground, out-of-hours applications, enclosed work sites or TV/film sets.

Larger systems can manage multiple power sources such as traditional generators and wind turbines – and can be monitored and adjusted remotely by our power experts to ourselves to ensure you are always receiving the most reliable, cost-effective power mix.



LX 45 90
45kVA



JCB Powerpack
23 kWh and 46 kWh

FUEL MANAGEMENT

Livink telemetry allows us to remotely monitor

- Generator performance** - keeping the load balanced
- Instant Alerts** - quick reaction to unit issues
- Full utilisation information**
- Fuel levels**
- Generator location**

DIESEL EASY CUBE 105L BOWSERS



- Weatherproof
- Robust steel construction
- Fork pockets
- Manual fuel pump with dispenser trigger nozzle

Capacity **105 L**

1000L-5000L STATIC FUEL BOWSERS



- Environmentally safe way to transport and store fuel
- Robust 110% bund
- 4 way fork pockets and lifting eyes

Capacity **from 1000 L to 5000 L**

1000L-2000L ROAD TOW FUEL BOWSERS




- Robust 110% bund
- 4 way fork pockets and lifting eyes
- Secure lockable lid
- Easy read fuel gauge

Capacity **1000 L / 2000 L**

HYBRID POWER

COMBINING AN ADVANCED MOBILE GENERATOR WITH A BATTERY STORAGE SYSTEM

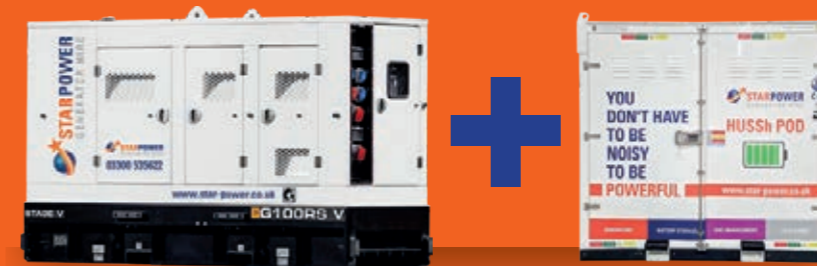


Running generators optimally over a 24-hour cycle can be a challenge as demand for power fluctuates. However, hybrid power systems can all but eliminate this problem.


Generators can always be run at their most efficient load levels to top up batteries so fuel consumption is optimised and the amount of carbon released is minimised.

Batteries also allows power to be delivered at night with zero noise and emissions.

SITE SERVICES




- Electrical testing 18th edition & PAT testing
- Electrical installation works



- Site plumbing services water & waste connections
- 110v temporary lighting and site transformer hire

CABLE HIRE



- Multicore cables from 6mm to 35mm
- Single core cables from 50mm to 240mm
- All cables are 25m length as standard
- Larger cables available with optional Powerlock

WATER BOWSERS



- Dust suppression spray bar
- Trace heating to prevent winter freezing
- Ball or eye hitch
- On demand water pump



- Jet wash options available
- Full site installation by the Star Power team
- Supplied full of water* ready to go

HEATING



- Fully automatic burner control with thermostat connection.
- The combustion chamber is heat resistant up to 850°C.
- Equipped with overheat protection and temperature limitation of warm air.
- Supplied with Intercal industrial burner with flow control.

THE STAR ADVANTAGE



INDEPENDENTLY OWNED



EXPERIENCED PROFESSIONALS



FIRST CLASS SERVICE. ALWAYS



**DELIVERY & COLLECTION
ACROSS THE UK BY OUR OWN FLEET**



OUR LOCATIONS

Head Office

Arenson Centre,
Arenson Way, Houghton Regis,
Dunstable, LU5 5UL

London & Luton Depot

Watling Street, Kensworth,
Dunstable, Bedfordshire,
LU6 3QT

Luton Training Centre

Luton Road, Markyate,
Hertfordshire, AL3 8QB

Kent Depot

Unit C, 1 Cannonbridge,
Cannonbridge Ind. Estate,
Cannon Lane, Tonbridge, TN9 1PP

Midlands Depot

Vulcan Way, Coalville,
Leicestershire, LE67 3FW

Reading Depot

Unit 6, Youngs Industrial Estate,
Paices Hill, Aldermaston,
Berkshire, RG7 4PW

East Anglia Depot

Station Business Park,
Station Road, Barnham,
Thetford, Suffolk, IP24 2PT

South West Depot

Unit 4 Cherry Orchard,
Squibbers Way, Bridgwater, TA6 5FB

Bristol Depot

14A Old Mill Road, Portishead,
Bristol, BS20 7BX

North West Depot

Unit 1A Lyncastle Road,
Barleycastle Lane,
Appleton, Warrington, WA4 4SN



0844 682 0000 | info@starplatforms.co.uk
www.starplatforms.co.uk



03300 535622 | enquiries@star-power.co.uk
www.star-power.co.uk