STAR PLATFORMS
POWERED ACCESS HIRE, SALES & TRAINING

Model	**Skyjack 3219**
Category	Scissor Lift

Working Height	7.80m
Stowed Height	1.64m
Width	0.81m
Lifting Capacity	227kg
Weight	1,312kg
Power	Battery

STANDARD FEATURES

- Drivable at full height with roll out deck fully extended
- Variable speed, front two wheel hydraulic drive
- 90° Steering (zero inside turning radius)
- Dual holding brakes
- Proportional controls for drive and lift functions
- 0.91 m Roll out extension deck
- 24V DC Power source
- Low voltage battery protection
- Relay-based control system
- SKYCODED™ Colour coded and numbered wiring system
- 30% Gradeability
- Solid rubber, non-marking tyres
- Pothole protection system
- Wiring for AC outlet on platform
- Tilt alarm with drive and lift cut-out
- Overload sensing system
- Lowering warning system
- Operator horn
- Half height spring hinged gate
- Hinged railing system
- Lanyard attachment points
- Forklift pockets and tie down/lift lugs

IPAF Category 3a

Do you hold a valid operator's licence?

The Powered Access Licence (PAL) Card is recognised worldwide as proof of platform operator training to the highest standard.

It is issued by the International Powered Access Federation (IPAF) to platform operators who successfully complete a training course at an IPAF approved training centre.

Quick checklist for employers and operators using powered access machines:

- ✓ **I have an IPAF PAL card**
- ✓ **Date is still valid (Licence expires after 5 years)**
- ✓ **All categories for the machine's being used are listed on the PAL card (e.g. 3a, 3b, PAV).**

If you can answer yes to all three, you're good to go!

If not, please call us to discuss your requirements and arrange a training course.

IPAF Member

STAR PLATFORMS
POWERED ACCESS HIRE, SALES & TRAINING

Skyjack 3219 Scissor Lift

Dimensions	3219
A Work Height	7.80 m
B Raised Platform Height	5.80 m
C Lowered Platform Height	0.99 m
D Overall Width	0.81 m
E Overall Length	1.78 m
F Stowed Height (Rails Up)	2.10 m
G Stowed Height (Rails Down)	1.75 m
H Platform Width (Inside Dimension)	0.66 m
I Platform Length (Inside Dimension)	1.63 m

Specifications	3219
Extension Deck (Roll Out)	0.91 m
Ground Clearance (Stowed)	6.03 cm
Ground Clearence (Raised)	1.78 cm
Wheelbase	1.40 m
Weight	1,312 kg
Gradeability	25%
Turning Radius (Inside)	0 m
Turning Radius (Outside)	1.68 m
Lift Time (With Rated Load)	25 sec
Lower Time (With Rated Load)	29 sec
Drive Speed (Stowed)	3.1 km/h
Drive Speed (Raised)	1.1 km/h
Maximum Drive Height	Full Height
Lifting Capacity	227 kg
Distributed Capacity (Main Platform)	114 kg
Distributed Capacity (Extension Deck)	113 kg
Local Floor Load (With Rated Load)	782 kPa
Overall Floor Load (With Rated Load)	11 kPa
Maximum Persons (Indoor/Outdoor)	2/1
Tyre Type	Solid, N/M
Tyre Size	12 x 4 x 8

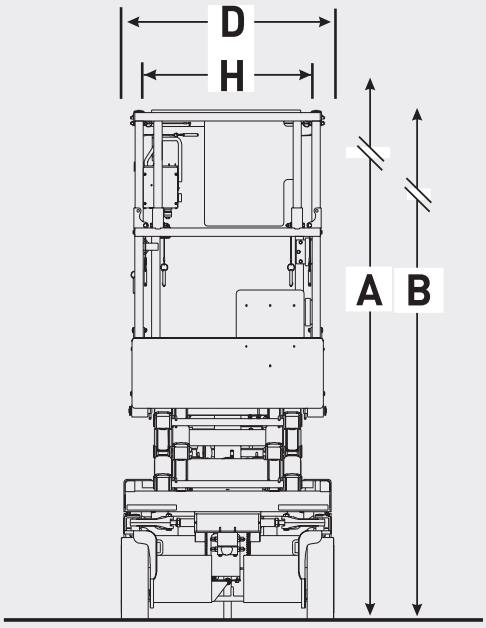

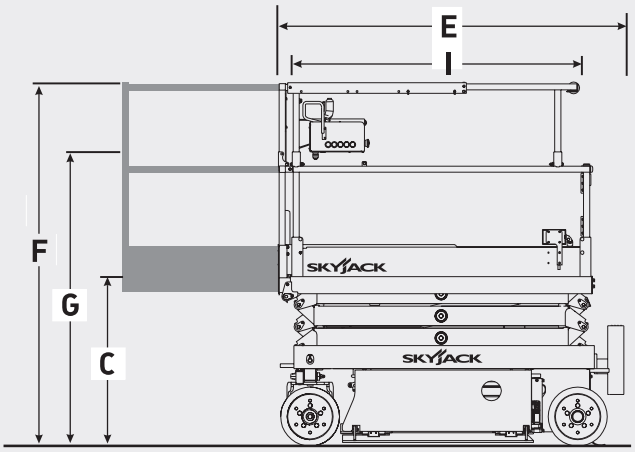

Special Features

- Skyjack's electrically powered scissor lifts offer a quiet, compact and versatile package with zero emissions, and are capable of manoeuvring in confined indoor and outdoor job sites and are suitable for a wide range of construction, maintenance and industrial applications
- Sturdy all steel design incorporates a manually operated roll out extension desk which increases work area and provides up-and-over capability
- Skyjack's unique clevis style design creates scissor ends that endure lower stress, and increased rigidity. This is achieved through symmetrical load distribution over the pins
- Removable, durable aluminium construction upper control box that's clear, intuitive, and easy to understand.

HIRE • SALES • TRAINING
0844 682 0000

NATIONAL COVERAGE

ACCESS ALLIANCE
We offer a true UK wide hire service via a network of strong regional access companies who share Star Platforms' values, offering high service levels and quality equipment.

For more information head to our website **starplatforms.co.uk**

This brochure is for illustrative purpose only and based on the latest information at the time of prining. CE marked work platforms are in conformance to Machinery Directive 2006/42/EC. E&OE