

HIRE

SALES

TRAINING

0345 130 0000

NATIONAL
COVERAGEModel
Type**Genie 3232
Scissor Lift**Work
Height

11.75m

Length

2.44m

Width

0.81m

Lifting
Capacity

227kg

Machine
Weight

2,352kg

Power
Use

Battery

**STANDARD FEATURES**

- Fixed rail with chain entry gate (standard GS™-2032)
- Folding rails with half-height swing gate (standard on GS™-2632, GS™-3232)
- Automatic leveling outriggers (GS™-3232 only)
- Dual front wheel drive
- Universal 27A smart charger
- Rear recessed charger receptacle
- SmartLink™ - proportional lift and drive
- Platform control with battery charge indicator and diagnostic display
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Manual hydraulic brake release
- Swing-out component trays
- Solid non-marking tyres
- Pothole guards
- Tilt level sensor with audible alarm
- Dual flashing LED beacons
- Descent alarm
- Electronic horn

IPAF Category 3a**Do you hold a valid operator's licence?**

The Powered Access Licence (PAL) Card is recognised worldwide as proof of platform operator training to the highest standard.

It is issued by the International Powered Access Federation (IPAF) to platform operators who successfully complete a training course at an IPAF approved training centre.


Quick checklist for employers and operators using powered access machines:

- ✓ **I have an IPAF PAL card**
- ✓ **Date is still valid**
(Licence expires after 5 years)
- ✓ **All categories for the machine's being used are listed on the PAL card (e.g. 3a, 3b, PAV).**

If you can answer yes to all three, you're good to go!

If not, please call us to discuss your requirements and arrange a training course.







For more information head to our website starplatforms.co.uk



Genie 3232 Scissor Lift

Dimensions	3232
Working Height Maximum	11.75 m
A Platform Height Maximum	9.75 m
B Platform Height Stowed	1.29 m
C Platform Length - Outside	2.26 m
Platform Length - Extended	3.18 m
D Platform Width - Outside	0.81 m
Fold Down Rails	1.10 m
E Height - Stowed	
Folding Guardrails	2.38 m
Rails Folded	2.03 m
F Length - Stowed	2.44 m
Length - Extended	3.33 m
G Width	0.81 m
F Wheelbase	1.85 m
I Ground Clearance - Centre	89 mm
J With Pothole Guards Deployed	22 m
Specifications	3232
Weight	2,352 kg
Gradeability	25%
Turning Radius (Inside)	zero
Turning Radius (Outside)	2.13 m
Lift Time (With Rated Load)	55 sec
Lower Time (With Rated Load)	28 sec
Drive Speed (Stowed)	3.5 km/h
Drive Speed (Raised)	0.8 km/h
Maximum Drive Height	6.71 m
Lifting Capacity	227 kg
Maximum Persons	2
Tyre Type	Solid, N/M
Tyre Size	38 x 13 cm

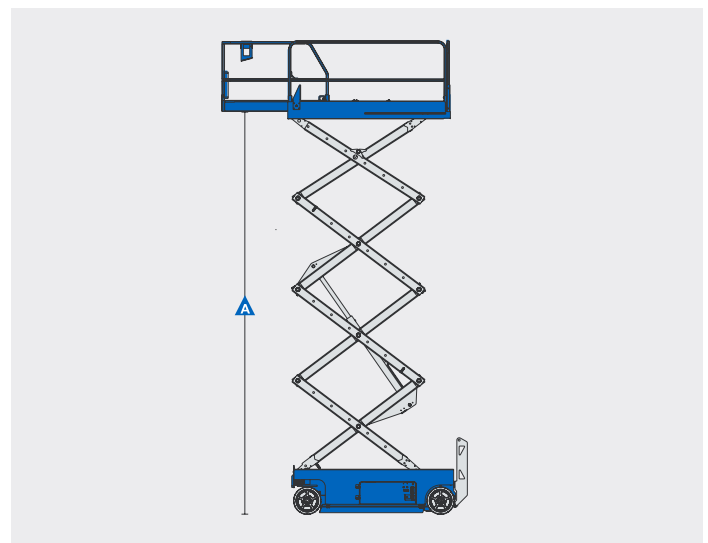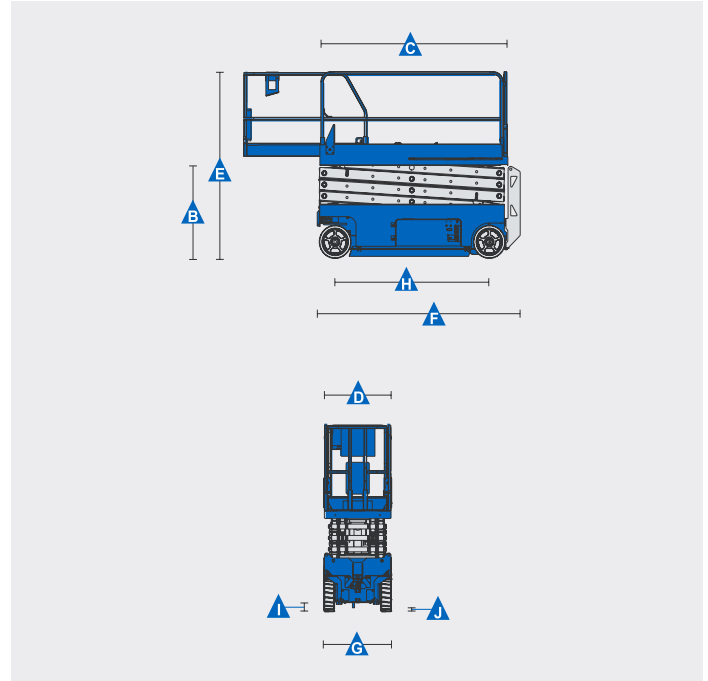

Special Features

- The quiet, zero-emission Genie® GS™-3232 slab scissor lift is ideal for operation in sound-sensitive environments. With front-wheel drive and zero inside turning radius, it boasts excellent maneuverability in tight spaces. It is purpose-built to perform in indoor and outdoor construction, maintenance and installation applications on firm, level surfaces.
- Automatic leveling hydraulic outrigger system levels machine on slopes up to 5°
- Link stack is centered at full elevation and platform extension for machine rigidity
- Compact dimensions and folding guardrails — easily passes through standard single or double doors
- 3-ft (.91 m) extension deck provides maximum platform workspace for workers and tools

HIRE • SALES • TRAINING
0345 130 0000



**NATIONAL
COVERAGE**



We offer a true UK wide hire service via a network of strong regional access companies who share Star Platforms' values, offering high service levels and quality equipment.

For more information head to our website starplatforms.co.uk

This brochure is for illustrative purpose only and based on the latest information at the time of printing. CE marked work platforms are in conformance to Machinery Directive 2006/42/EC. E&OE