

Model	<b>Dingli AMWP8-1200</b>	
Category	Vertical Mast Lift	
Working Height	8.00m	
Stowed Height	1.99m	
Width	0.80m	
Lifting Capacity	136kg	
Weight	1120kg	
Power	Battery	

## STANDARD FEATURES

- Electric motor drive, increasing productivity and efficiency
- 25% gradability
- Non marking tyres
- Automatic pothole protection
- Cylinder holding valve
- Emergency stop button
- Two controllers operation
- Emergency lowering system
- Leveling sensor
- Forklift pockets
- All motion alarm
- Transport tie hole
- Battery charger indicator
- Electric limit switch
- Drivable at full height
- Overload sensor with alarm
- Onboard diagnostic system
- Flashing Beacon
- AC power to platform

## IPAF Category **3a**

Do you hold a valid operator's licence?

**The Powered Access Licence (PAL) Card is recognised worldwide as proof of platform operator training to the highest standard.**

It is issued by the International Powered Access Federation (IPAF) to platform operators who successfully complete a training course at an IPAF approved training centre.

Quick checklist for employers and operators using powered access machines:

- ✓ **I have an IPAF PAL card**
- ✓ **Date is still valid (Licence expires after 5 years)**
- ✓ **All categories for the machine's being used are listed on the PAL card (e.g. 3a, 3b, PAV).**

If you can answer yes to all three, you're good to go!


If not, please call us to discuss your requirements and arrange a training course.

## Dingli AMWP8-1200 Vertical Mast Lift

Dimensions	AMWP8-1200
A Work Height	8.00m
B Raised Platform Height	6.00m
C Overall Length	1.39m
D Overall Width	0.80m
E Overall Height	1.99m
Platform Size (Length F/ Width G)	0.71 x 0.75m
H Platform Extension	0.53m
Weight	1120kg

Specifications	AMWP8-1200
Ground Clearance (Stowed)	0.06mm
Ground Clearance (Rasied)	0.019mm
Wheel Base	1.07m
Lifting Capacity (SWL)	159kg
Distributed Capacity (Extension Deck)	136kg
Max. Persons	1
Travel Speed (Stowed)	4km/h
Travel Speed (Raised)	1.1km/h
Up/Down Speed	23/25secs
Gradability	25%
Maximum Slope	X-1.5°/Y-3°
Tyre	323x100mm
Charger	24V/15A
Driving Motor	2x24VDC/1kW
Lifting Motor	24VDC/2kW
Batteries	2x12V/100Ah

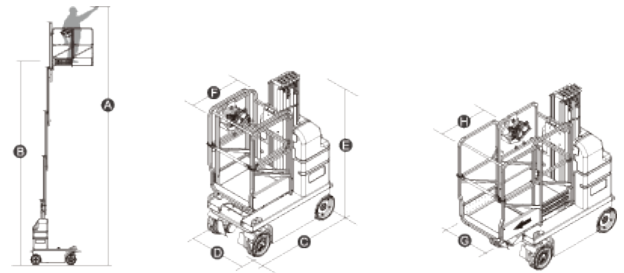

TRAINING

SALES

HIRE

0844 682 0000



**NATIONAL  
COVERAGE**

**ACCESS  
ALLIANCE**

We offer a true UK wide hire service via a network of strong regional access companies who share Star Platforms' values, offering high service levels and quality equipment.

For more information head to our website [starplatforms.co.uk](http://starplatforms.co.uk)